




i-power 8.7[®] Battery pack

Rechargeable lithium-ion battery pack

Safety card

Thank you for purchasing the i-power 8.7[®] Battery pack. This quick exchange i-power battery system makes the battery powered machines of i-team Professional a real cleaning workforce. The 14.4 V 8.7 Ah li-ion rechargeable battery pack can be used for the products from the i-series of i-team Professional. For information on charging the i-power 8.7 Battery pack please refer to the i-charge 5[®] user manual. On certain i-team devices it can be charged by a 5V USB-C adapter.

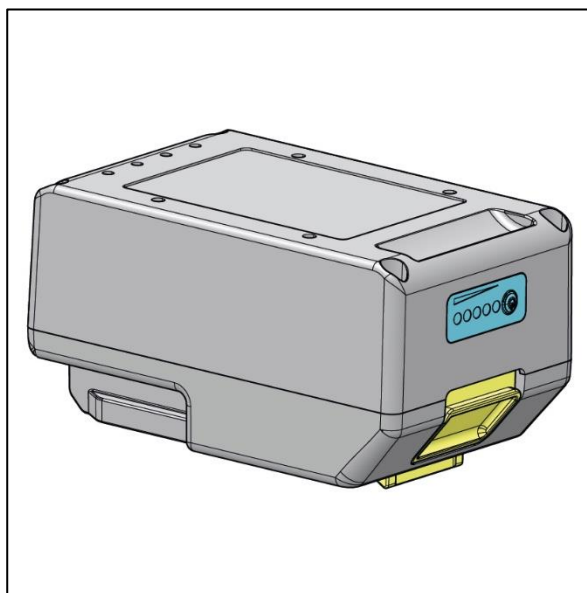

Features & Benefits

- Universal usability across various i-team products.
- Maximum safety thanks to i-power proactive Battery Management System (BMS).
- Near zero self-discharge thanks to high-quality lithium-ion cells.

Specifications

If the content of this package is incomplete or damaged please contact point of purchase. Use the original i-team packaging when sending back the product to i-team Professional or your registered i-partner.

Product size (per battery pack):	120 x 80 x 65 mm
Weight (per battery pack):	0.52 kg
Battery type:	Li-on battery
Nominal voltage:	14.4 V
Nominal capacity:	8.7 Ah
Nominal energy:	125 Wh

i-team Professional b.v.

Hoppenkuil 27b, 5626 DD Eindhoven, The Netherlands

Telephone: +31402662400

Email: hello@i-teamglobal.com

Internet: www.i-teamglobal.com





Intended use

- The i-power 8.7® Battery pack should only be used in i-team battery powered machines.
- The i-power 8.7 Battery pack should only be charged with an original i-charge battery charger of i-team Professional.

Non-intended use

Do not use the i-power 8.7 Battery pack as a power source for any other machine than the battery powered machines of i-team Professional.

Safety

General precautions



CAUTION

- Always comply with the battery charger user manual.
- Before first time use you must fully charge the battery pack.
- Remove the battery pack from the charger when it is fully charged.
- Do not crush, pierce or damage in any way.
- Do not heat or incinerate.
- Do not short-circuit.
- Do not dismantle.
- Keep dry.
- Only charge between 5° C~40° C / 41° F~104° F.
- Only use between 5° C~45° C / 41° F~113° F.
- Storage temperature: -10°~40° C / 14° F~104° F, but battery pack must be brought to a temperature of at least 5° C / 41° F before being used.

Health hazards



WARNING

If exposed to any of the battery pack chemicals, please follow the procedures below:

Eyes - Flush the eyes with plenty of water for at least 15 minutes, holding the upper and lower eyelids open from time to time.

Inhalation - Leave the area in which the contact occurred immediately and seek fresh air. Use oxygen if available.

Ingestion - Give the person at least two glasses of milk or water. Induce vomiting if the patient is conscious. Seek medical attention.

- A damaged or leaking battery can cause chemical burns upon contact.
- Risk of battery chemical exposure only occurs if the battery pack is abused or damaged.
- Contact of electrolyte and lithium with skin and eyes should be avoided.

Material Safety Data Sheet

Information on the i-power 8.7 battery pack can be found on the **MATERIAL SAFETY DATA SHEET**, MSDS number 01051900007845-7(E).